


## MRH Series Hollow Plunger Hydraulic Cylinder

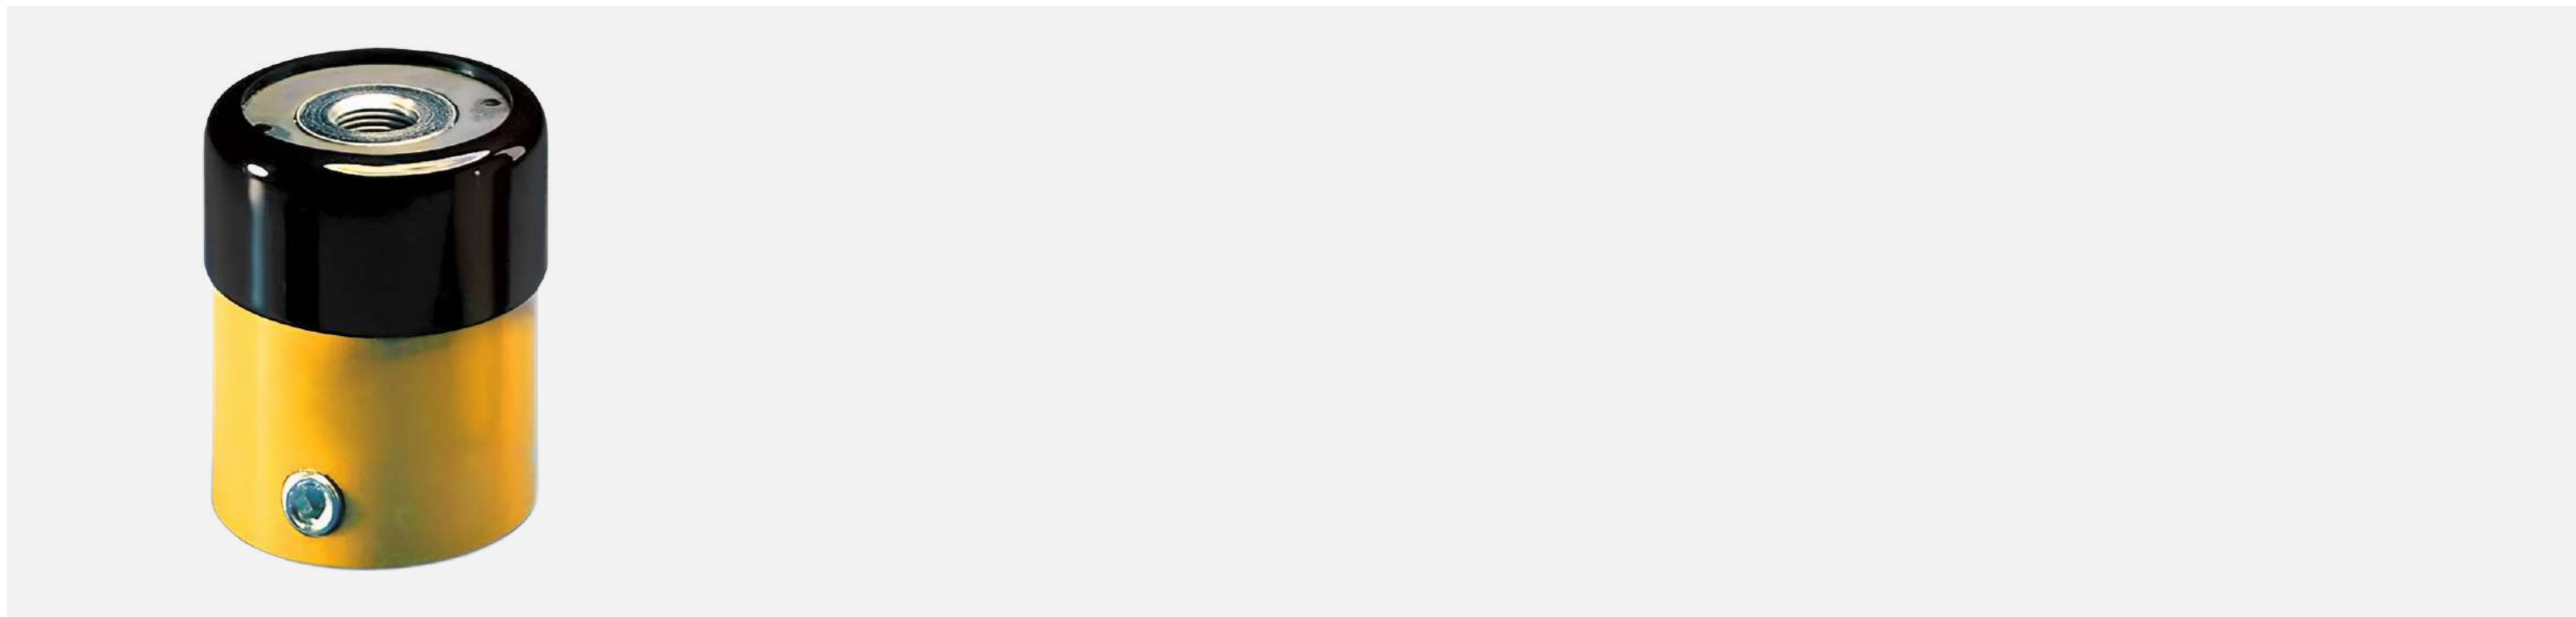

### Product description:

Maximum Operating Pressure: 3000/5000 PSI

Maximum Cylinder Capacity Advance: 4000/13800

lbs

Stroke: 8.1/8.4 mm

Return Type: Single-Acting, Spring Return

Plunger Type: Hollow

Material: Steel

Weight: 0.6/1.4 kg

Oil Capacity Advance: 0.41/0.86 in<sup>3</sup>

Cylinder Effective Area Advance: 1.33/2.76 in<sup>2</sup>

Manufacturer:SAIVS

Product	Maximum Operating Pressure (psi/bar)	Maximum Cylinder Capacity Advance (lbs/kN)	Stroke (in/mm)	Center Hole Diameter Y (in)	Return Type	Plunger Type	Material	Cylinder Effective Area Advance (in <sup>2</sup> )	Oil Capacity Advance (in <sup>3</sup> )	Weight (lbs/kg)
MRH20	3000   210	4000   17.8	0.33   8.4	0.5	Single-Acting, Spring Return	Hollow	Steel	1.33	0.41	1.3   0.6
MRH120	5000   350	13800   61.4	0.32   8.1	0.77	Single-Acting, Spring Return	Hollow	Steel	2.76	0.86	3.1   1.4